



# ScreenTrak® Soprano - Mounting

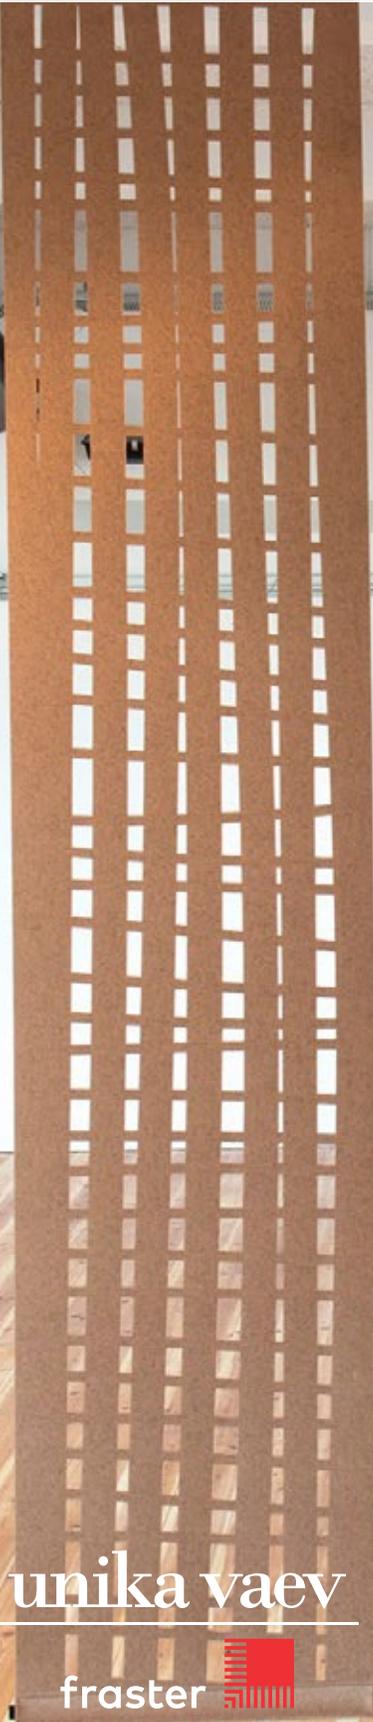

unika vaev

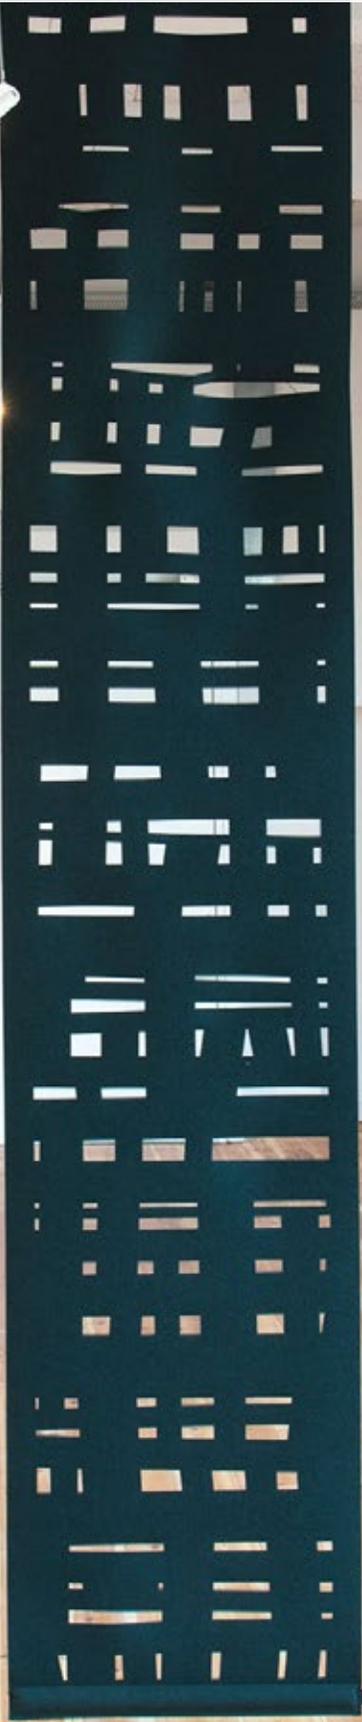

Hear yourself think®

# ScreenTrak® Soprano - Magnet Mounting

The magnets used for mounting ScreenTrak® Soprano are **extremely powerful** and must be handled with caution. **Maximum thickness for any piece of glass in use cannot exceed 0.39" (10mm)**

Before the magnets are separated from each other, please note that they must point towards each other for mounting. The magnets can be marked with a marker on both sides to indicate which direction they will need to face -- towards each other.

If the magnets are adjoined without the provided plastic ring, or similar thick material, it can be very difficult to separate them again.

Mounting on glass requires two people, one on either side of the glass. One person holds the first magnet on the selected spot of the glass while the other person places the second magnet on the opposite side of the glass, approximately 12" away from the first magnet. The second magnet is then carefully glided towards the first magnet until they adjoin.

## Spray adhesive may also be used for larger-scale ScreenTrak® Soprano covers to ensure stability.

Cut a hole with the diameter of approx. 1" in the middle of a piece of cardboard. Use it as a template when spraying glue on the glass.

Measure on the glass where Soprano is to hang. Use a marker to mark the center of all holes where the magnets are to be placed. It is not necessary to mark and glue the magnets at the bottom of the Soprano.


Use the cardboard template to spray adhesive on both sides of the glass where magnets are to go.

Allow the adhesive to dry completely.

Place the front magnet on the glued spot, press it firmly to secure. Slide the second magnet slowly from a distance of about 20 inches (half meter) into place on the backside of the glass. Press the magnet firmly to secure.


Mount ScreenTrak® Soprano on the magnets and place the 'metal lock' on top.

\*The spray adhesive 3M-77 can be used.

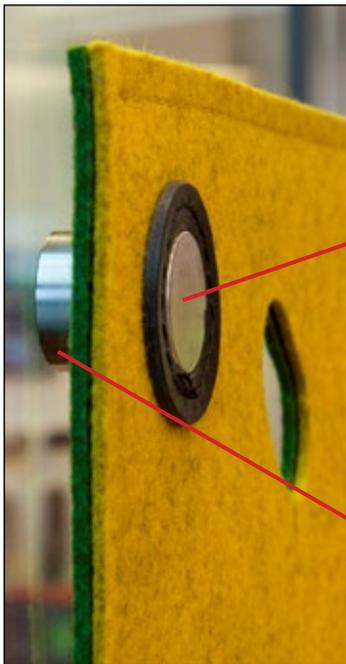

Magnet #1 inserted into Soprano

Magnet #2 slid into place behind glass

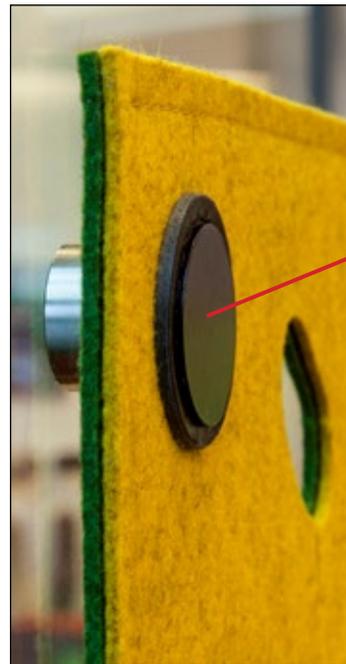


Magnet #1 hidden with plastic cover

# ScreenTrak® Soprano - Wire Mounting


Top Fitting



Screw into ceiling

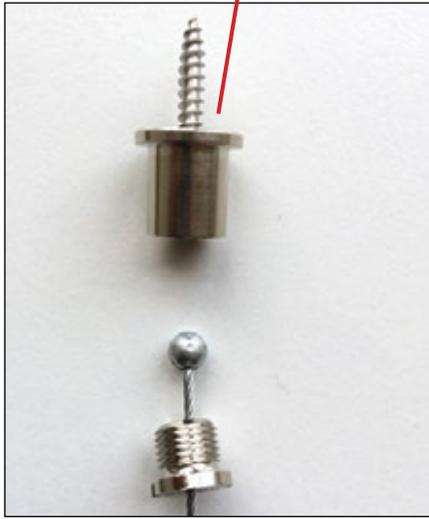


Screw both parts together

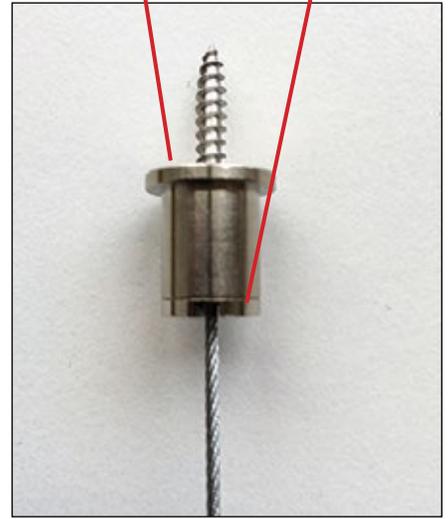


Bottom Fitting




Adjust the length of the wire by pressing here

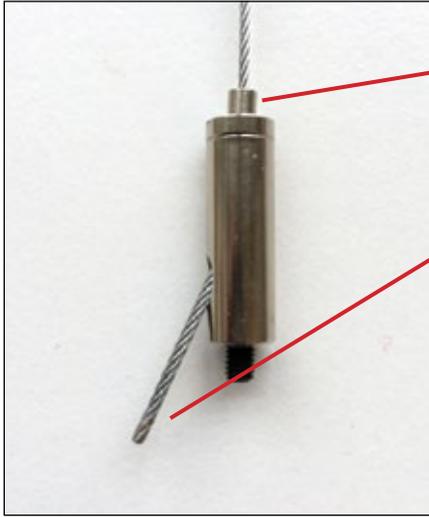

Pull wire to desired length here

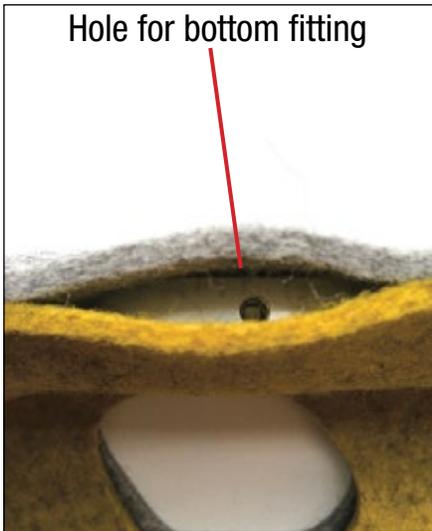

Hole for bottom fitting


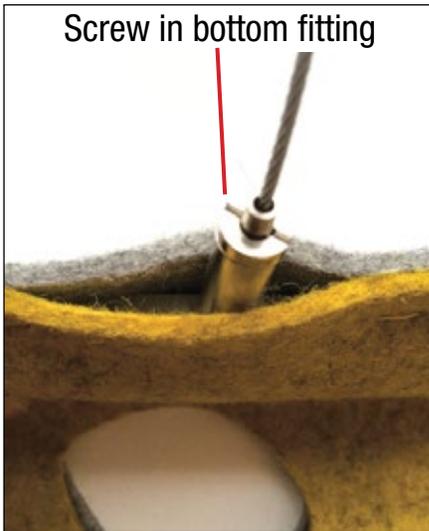


Screw in bottom fitting

Soprano Fitting

unika vaev

# ScreenTrak® Soprano - Ceiling & Wall

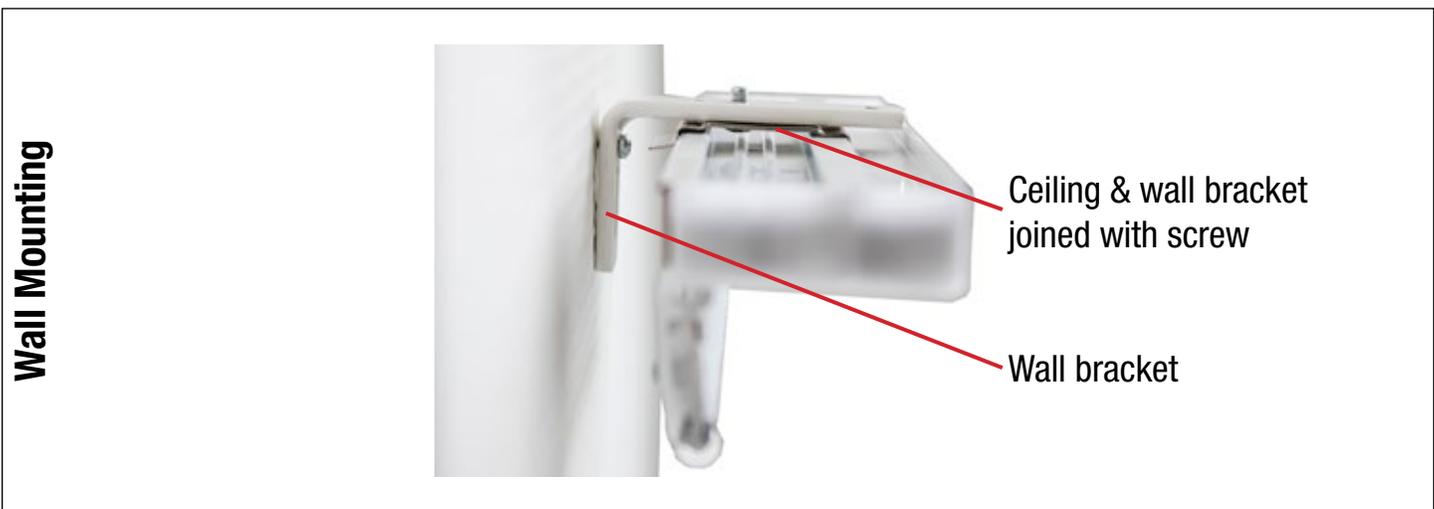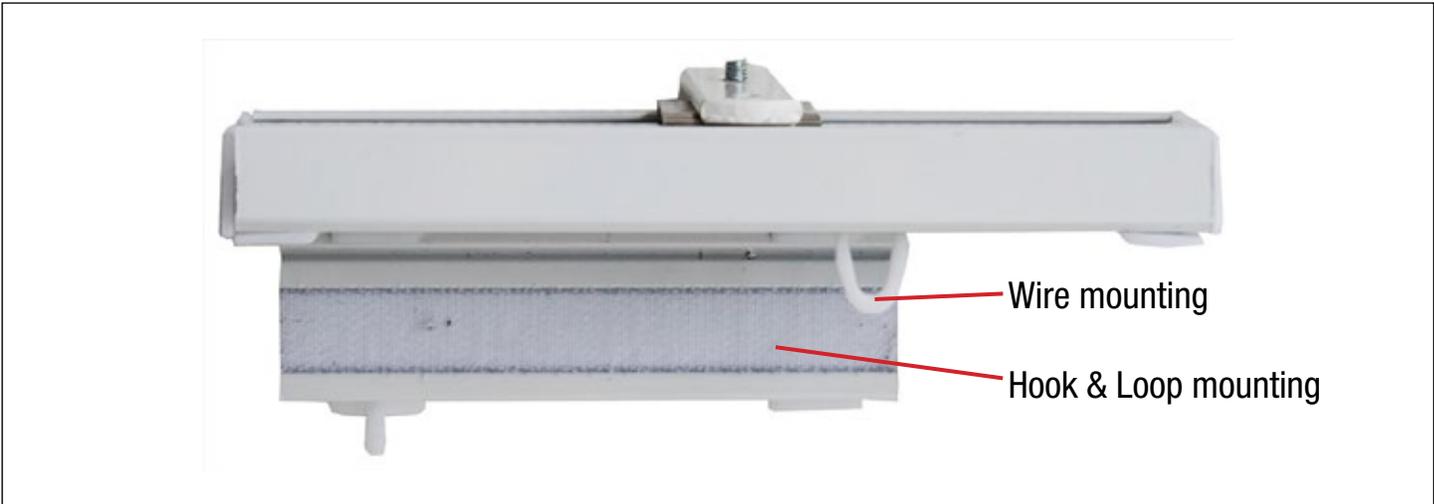


# ScreenTrak® Soprano - All Mounting Options

## Mounting with magnets on glass


\*Please note that the thickness of the glass in use cannot exceed 0.39" (10mm)

Magnet  
Magnet lock  
Leather ring




## Mounting with Hook & Loop in rail

Rail  
Panel wagon  
Hook & Loop




## Mounting with wire and screw

Screw in ceiling  
Wire  
Adjusting wire length  
Metalbar i top and bottom




## Mounting with wire and rail

Rail  
Wire with hook  
Adjusting wire length  
Metalbar i top and bottom



## Mounting with wire and eyelet magnet


Eyelet magnet  
Wire with hook  
Adjusting wire length  
Metalbar i top and bottom



## Mounting with grommets


\*Number and placement of grommets defined by customer

1" Ø (25mm)  
1.8" Ø (45mm)



## Mounting of rail in ceiling

Ceiling  
Bracket  
Rail



## Mounting of rail on wall

Bracket  
Rail



unika vaev