

ECOUSTIC® CEILING EDIT



unika vaev

INSTYLE

Hear yourself think®

ECOUSTIC® CEILING EDIT COLOR

.47" Options



ALMOND




ATOM



AZURE




BLUEBELL



CAVE



CIRRUS



COOL



DENIM



FAWN



GALAXY



HORIZON



IRIS




ISLE



LEAF



OLIVE



OXIDE



SNOWDROP



TRUFFLE



TUNGSTEN



VENUS


.94" Options



Ash



Graphite



Nero



Pure



Stone

Product may vary in color due to the nature of the media
Please refer to website for current color range


ecoustic® global leaders
by INSTYLE in acoustic
products

ECOUSTIC® CEILING EDIT PROFILES

Ceiling Edit - Angle




FRONT VIEW



47 ¹³/₁₆"


23 ¹³/₁₆"

SIDE VIEW




1/2" or 15/16"

Ceiling Edit - Code

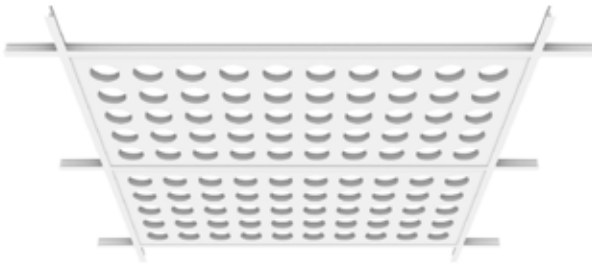


FRONT VIEW

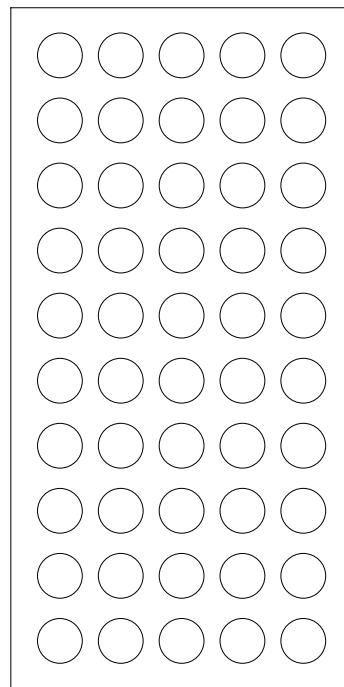

47 ¹³/₁₆"

23 ¹³/₁₆"

SIDE VIEW



1/2" or 15/16"

Product may vary in color due to the nature of the media
Please refer to website for current color range


ecoustic® global leaders
by INSTYLE in acoustic
products

ECOUSTIC® CEILING EDIT PROFILES


Ceiling Edit - Data




FRONT VIEW

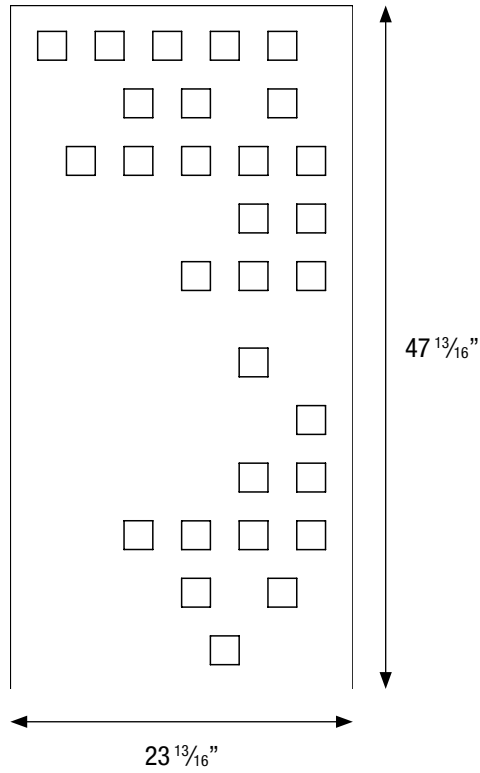


SIDE VIEW

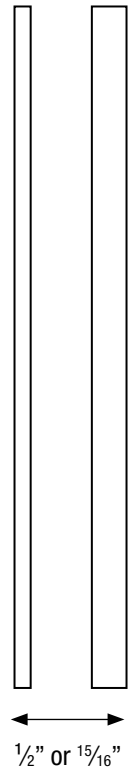


Ceiling Edit - Dot

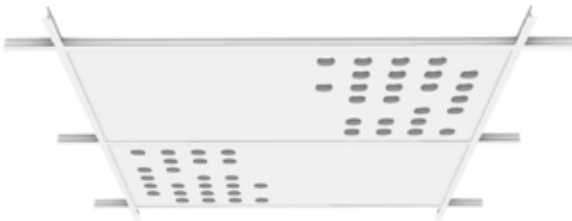

FRONT VIEW

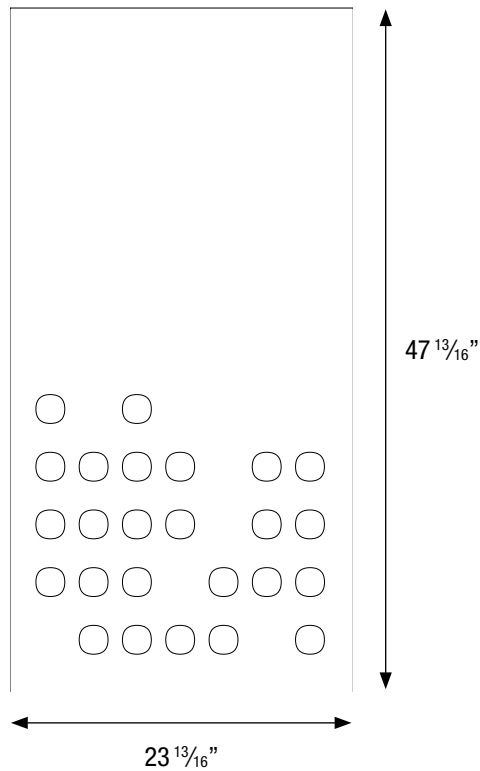

SIDE VIEW

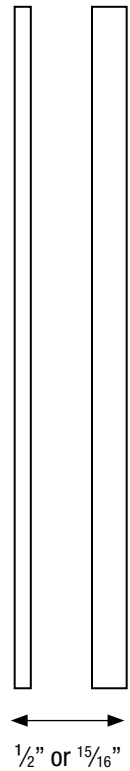

Product may vary in color due to the nature of the media
Please refer to website for current color range


ecoustic® global leaders
by INSTYLE in acoustic
products

ECOUSTIC® CEILING EDIT PROFILES


Ceiling Edit - Ray



FRONT VIEW

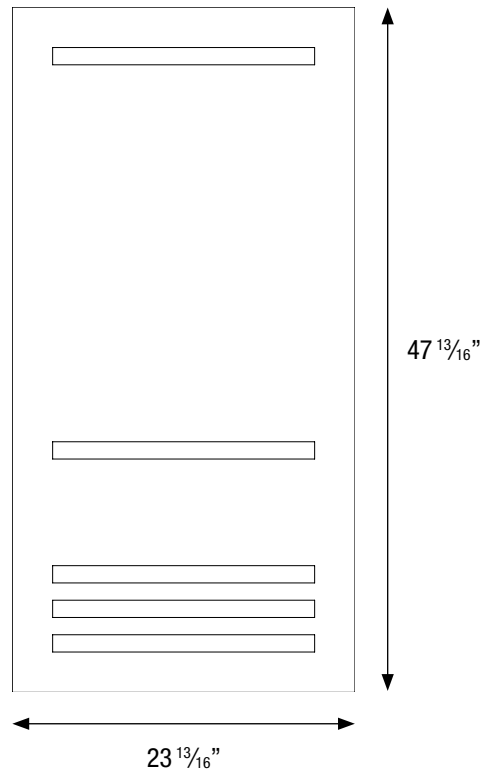


SIDE VIEW

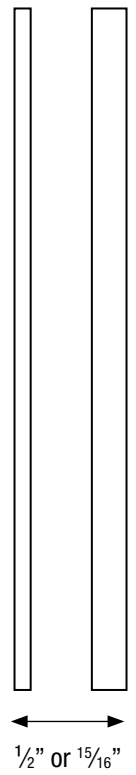

Product may vary in color due to the nature of the media
Please refer to website for current color range

ecoustic® global leaders
by INSTYLE in acoustic
products

ECOUSTIC® CEILING EDIT

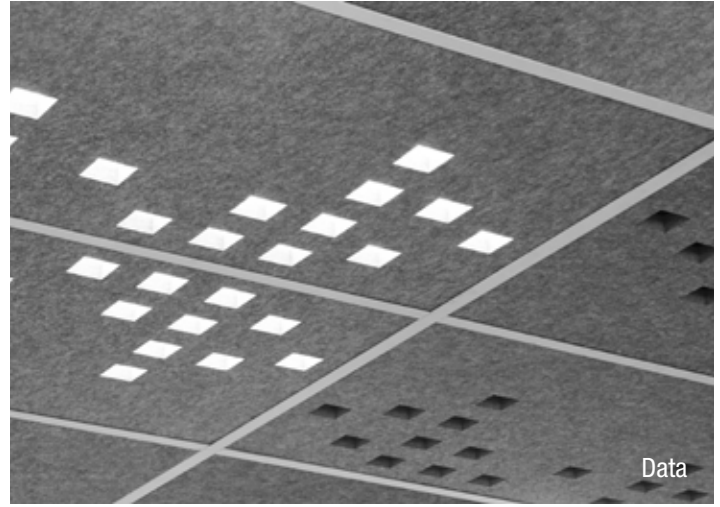

COMPOSITION 100% PET

DIMENSIONS 47 13/16" x 23 13/16" (1215mm x 605mm)

THICKNESS 0.47" or 0.94" (12mm or 24mm)

FIRE RATING
AS/ISO 9705 Group 1
ASTM E84 0.47" Class A, 0.94" Class C

APPLICATION Ceiling

ACOUSTIC
0.47" Tile NRC 0.85 (8" air gap)
0.94" Tile NRC 0.95 (8" air gap)



PLEASE NOTE It is the responsibility of site installation managers to confirm compatibility between the ceiling grid system specified and the dimensions of ecoustic® ceiling tiles prior to placement of purchase order. Custom sized ecoustic® ceiling tiles can be produced, however, conditions do apply. Please contact Unika Vaev customer service or your local sales representative for more information.

Designed for the Environment: Easy to disassemble and separate into the appropriate recycling systems, Ceiling Edit tiles can be recycled.

- Mindful MATERIALS
- Low-VOC
- Oeko-Tex Certified
- Prop 65 Compliant
- Declare CDHP Emissions Compliant
- Global Greentag
- HPD
- ISO 14001-certified Environmental Management System
- Solid Core panels used to produce ecoustic® Edit are Cradle to Cradle - Bronze certified

Building Rating Systems: Ceiling Flats will contribute the following points for Green Star, LEED + WELL building standards

Criteria	Green Star	LEED	WELL
Low VOC	✓	✓	✓
Recycling Program	✓	✓	N/A
3rd Party Certification	-	✓	✓
Manufacturer Certified EMS	✓	✓	N/A
Toxic Material Reduction	N/A	N/A	✓
Sound Reducing Surfaces	N/A	N/A	✓

Declare. EPD®

certified cradle to cradle BRONZE

mindful MATERIALS


GLOBAL GREEN TAG green-product certification

OEKO-TEX® CONFIDENCE IN TEXTILES **STANDARD 100**

Product may vary in color due to the nature of the media
Please refer to website for current color range

ecoustic® global leaders
by **INSTYLE** in acoustic products

ECOUSTIC® CEILING EDIT

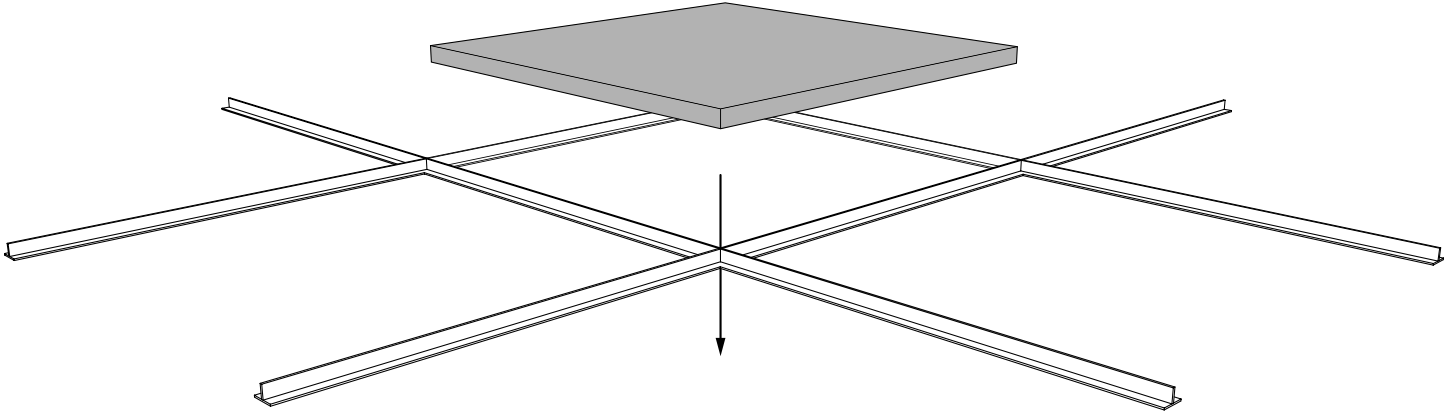

ecoustic® Ceiling Edit (per box in a single color)
SC 0.47": (8) Tiles per box
SC 0.94": (4) Tiles per box

How to Specify	
Design	Angle, Code, Data, Dot, or Ray
Size	47.8" x 23.8" (1215mm x 605mm)
Thickness	0.47" or 0.94" (12mm or 24mm)
Color	15 colors of 0.47" SC 5 colors or 0.94" SC
Acoustic Mesh	Optional black acoustic mesh backing

HVAC: Ensure ecoustic® Edit is compliant with the specified HVAC system. Edit is recommended for Ducted Return Air and is not Plenum Return Air rated.

Back Loading: ecoustic® Edit ceiling tiles are not suitable for back loading. Loads must be supported independently by the grid or through the use of additional fixtures.

Toxicity: Polyester is non-toxic and is classed the same as wood under the State of New York Article 15 Part 1120. Edit does not contain any Red List Chemicals (USA EPA).

Back Lighting: LED lights can be integrated seamlessly on top of ecoustic® Edit ceiling tiles.

Drop Ceiling Specification: ecoustic® Edit drop-in ceiling tiles are designed to be compatible with 15mm and 24mm Exposed Tee 1200 grid systems. Ensure the tile is suitable for your selected system prior to ordering.

Moisture Absorption: After four days at 50°C, 95% RH the moisture absorbency of SC 12mm was less than 0.3% by weight respectively. As ecoustic® Edit is 100% polyester, it will not degrade over time due to moisture, mildew or rot in office environments.

Fixtures: Any fixtures must be supported independent to the ecoustic® Edit ceiling tiles. The tiles can be cut on site to accommodate for new and existing lighting and fixtures. When cutting use a new blade for each cut and ensure the area to be cut is fully supported throughout. Cut from the tile face with care.

Product may vary in color due to the nature of the media
Please refer to website for current color range

ecoustic® global leaders
by INSTYLE in acoustic
products