

Holly Installation + Care




holly-install-3-22

unika vaev
abstracta

Holly Vertical Assembly

Components Included:

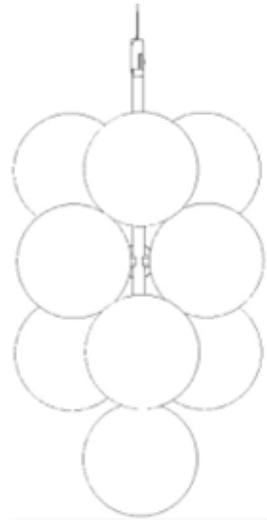

Holly (1x)



Gripper (1x)




Ceiling Bracket (1x)
[T24 profile]



Nut M4 (1x)




Roof Bracket (2x)

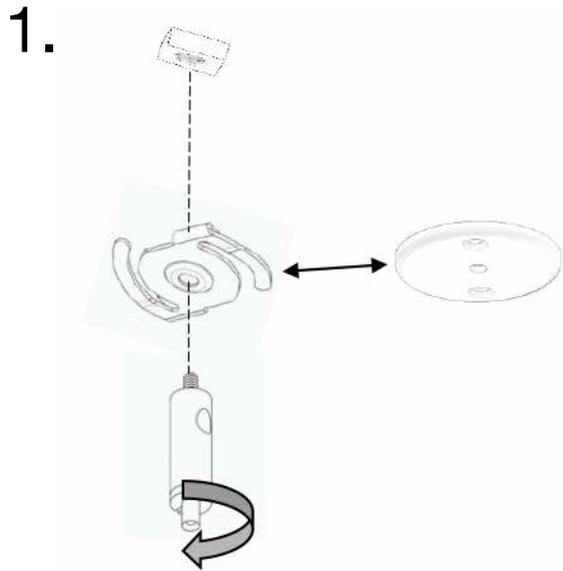


2.


A. Insert the wire into the gripper. Always insert the wire through the pin unless otherwise stated.





B. Adjust the gripper up. When you let go of the gripper it will automatically lock itself on the wire.



C. Press the pin and adjust down. When you press the pin the lock opens and the gripper slides up and down on the wire. Release the pin to lock the gripper again.



3.

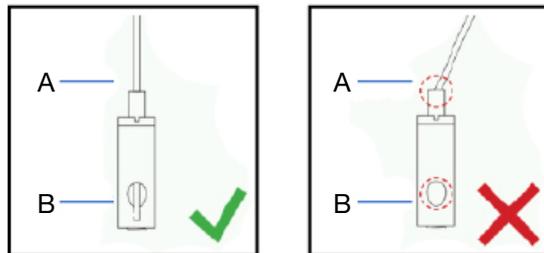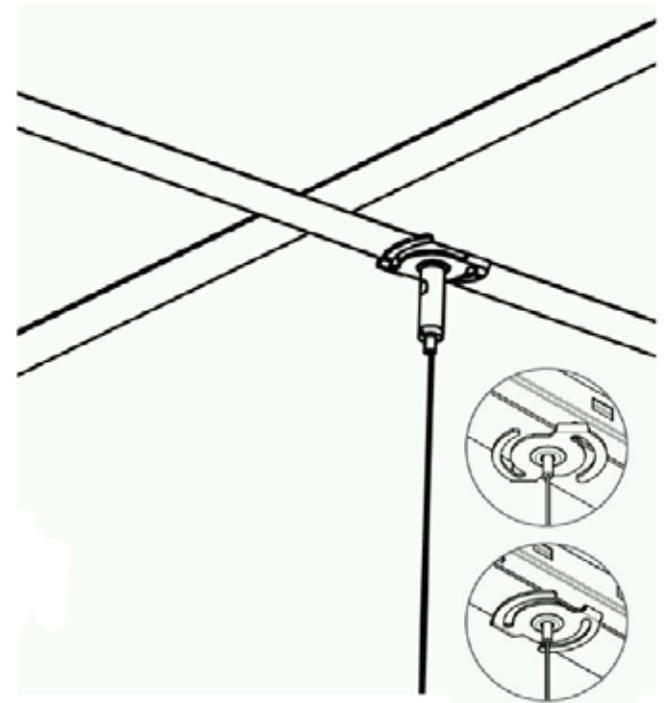


A. Direction of wire and gripper must be in a straight line

B. The wire must be inserted all the way through the gripper and protrude at least .2" from bottom.




Holly Vertical Lamp Assembly

Components Included:

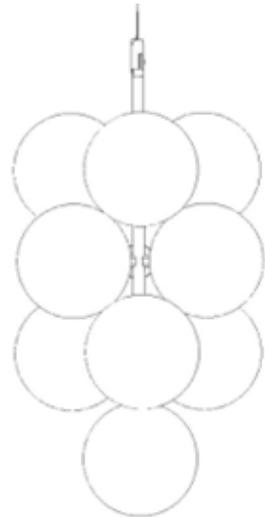


Holly (1x)



Ceiling Bracket (1x)
[T24 profile]



Gripper (1x)

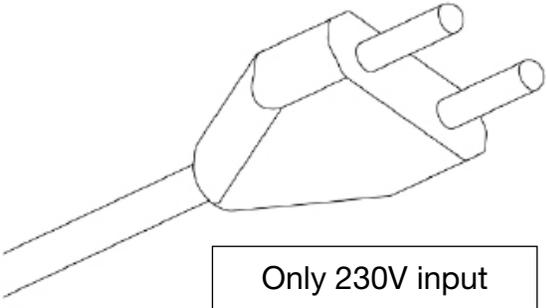


Only 230V input



Roof Bracket (2x)



Nut M4 (1x)

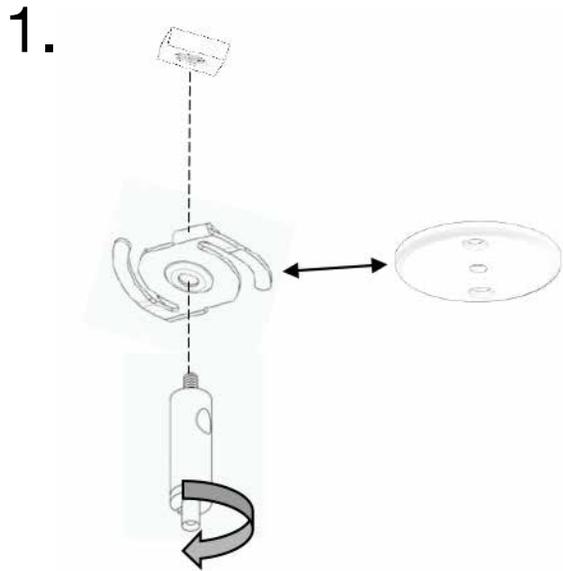


2.

A. Insert the wire into the gripper. Always insert the wire through the pin unless otherwise stated.





B. Adjust the gripper up. When you let go of the gripper it will automatically lock itself on the wire.



C. Press the pin and adjust down. When you press the pin the lock opens and the gripper slides up and down on the wire. Release the pin to lock the gripper again.



3.

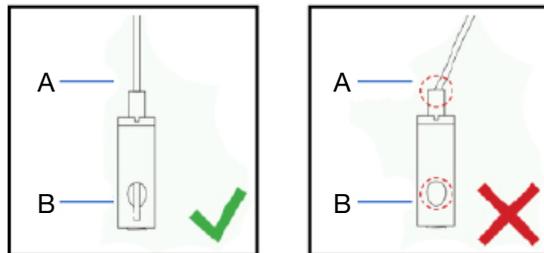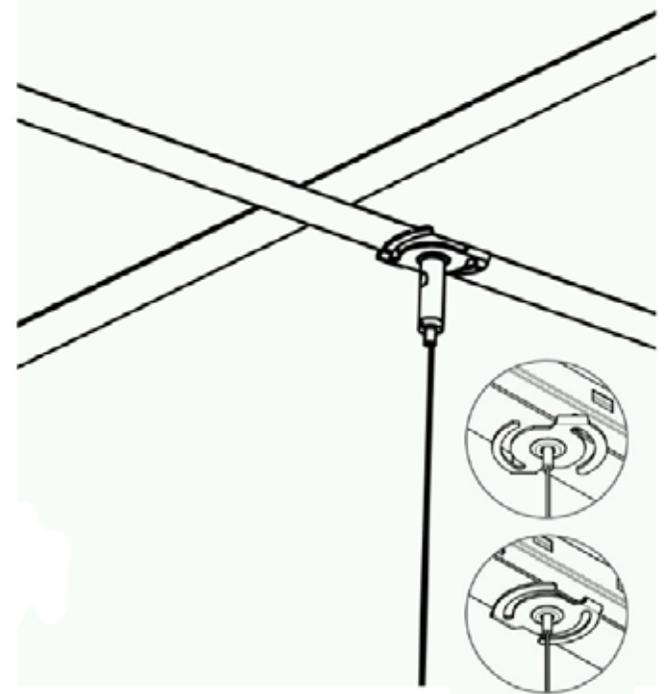


A. Direction of wire and gripper must be in a straight line

B. The wire must be inserted all the way through the gripper and protrude at least .2" from bottom.



Holly Horizontal Assembly

Components Included:

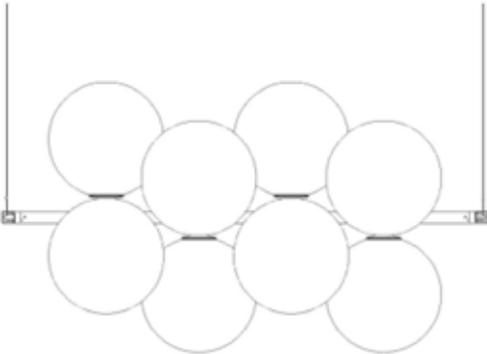

Holly (1x)



Gripper (1x)



Ceiling Bracket (1x)
[T24 profile]




Nut M4 (1x)




Roof Bracket (2x)

1.

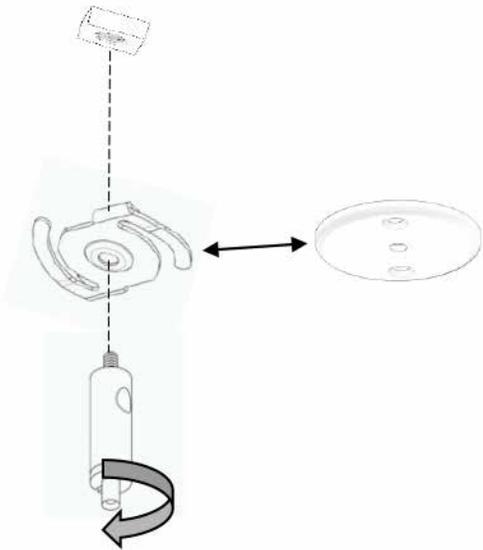


2.


A. Insert the wire into the gripper. Always insert the wire through the pin unless otherwise stated.






B. Adjust the gripper up. When you let go of the gripper it will automatically lock itself on the wire.



C. Press the pin and adjust down. When you press the pin the lock opens and the gripper slides up and down on the wire. Release the pin to lock the gripper again.



3.

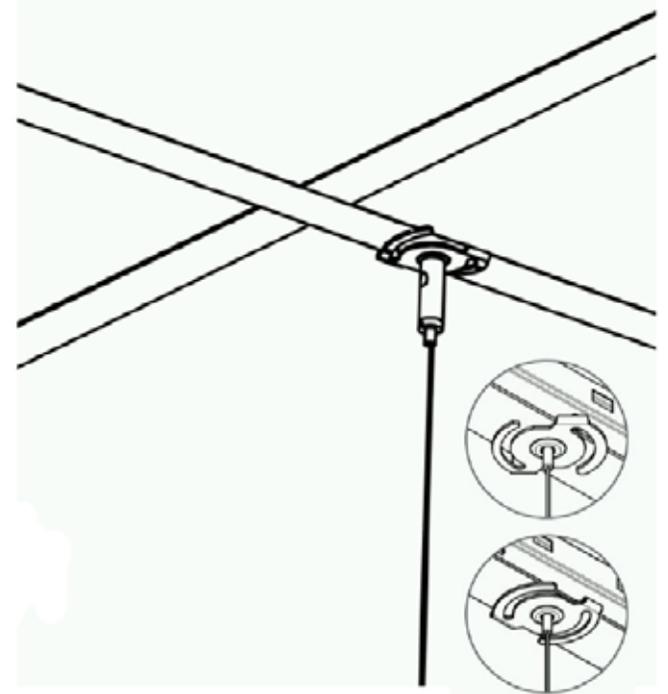


A. Direction of wire and gripper must be in a straight line

B. The wire must be inserted all the way through the gripper and protrude at least .2" from bottom.



Holly Horizontal Lamp Assembly

Components Included:

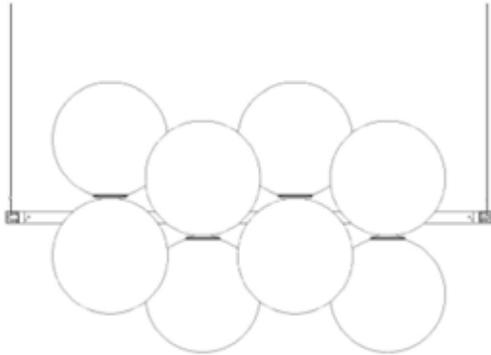


Holly (1x)



Ceiling Bracket (1x)
[T24 profile]



Gripper (1x)

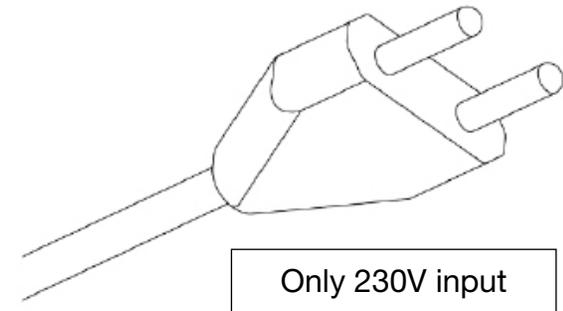

Only 230V input




Roof Bracket (2x)




Nut M4 (1x)

1.

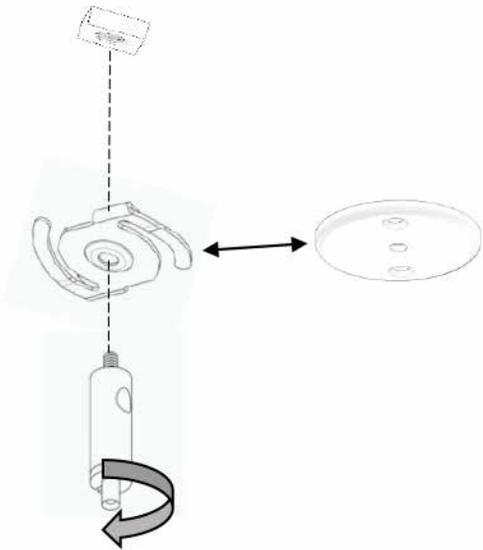


2.


A. Insert the wire into the gripper. Always insert the wire through the pin unless otherwise stated.






B. Adjust the gripper up. When you let go of the gripper it will automatically lock itself on the wire.



C. Press the pin and adjust down. When you press the pin the lock opens and the gripper slides up and down on the wire. Release the pin to lock the gripper again.



3.

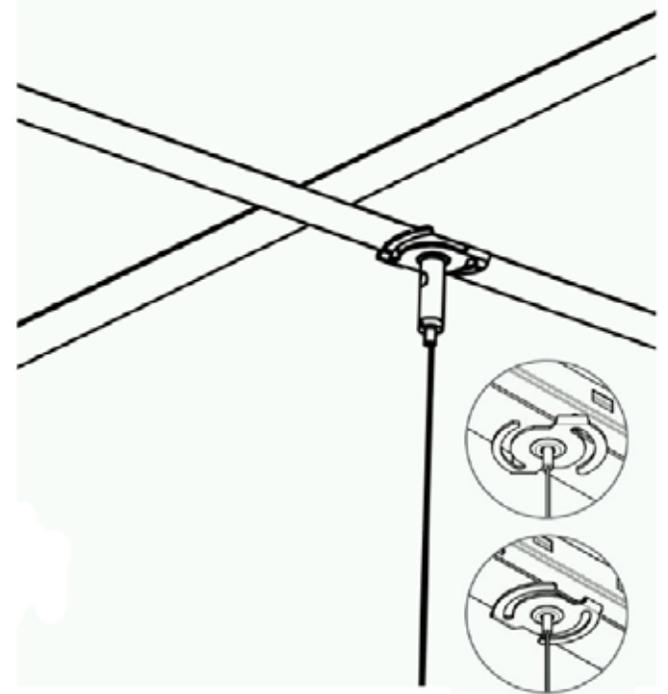

A. Direction of wire and gripper must be in a straight line

B. The wire must be inserted all the way through the gripper and protrude at least .2" from bottom.



Holly Care Instructions

To maintain the color and appearance of the Holly units we recommend regularly vacuuming the globes with a soft brush nozzle.

To remove stains, gently dab or wipe the globes with a damp cloth.

